




Volcano Maxx



18500000112 0 00
 15W 1375lm 6000K
 Cut Off Angle : 12°
 Led Color Optics Finish
 C 6000K 12° W White
 N 4000K 24° B Black
 W 3000K 36° S Silver

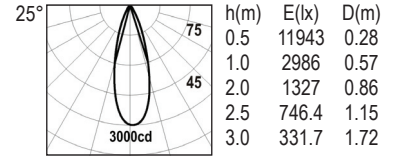

18500000212 0 00
 26W 2250lm 6000K
 Cut Off Angle : 12°
 Led Color Optics Finish
 C 6000K 12° W White
 N 4000K 24° B Black
 W 3000K 36° S Silver

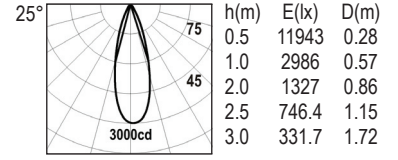

▲ Dia 190
Circular Flange



▲ Dia 190X190
Square Flange



- Inground directional up light for LED for mounting into concrete surface
- Available as walkover, drive over and under water application
- Construction - outer housing in aluminium with pre drilled holes for water drainage, inner casing in electropolished SS-304 to give long life & top flange in electropolished in SS-304/SS-316
- Double silicone gasket for moisture protection

- Polyester powder coated with high U.V. & corrosion resistance
- Toughened step extra clear safety glass 12mm incorporated to avoid dirt contamination
- For walk over static load maximum 2 tons and for drive over maximum 5 tons @ 30km/hrs
- Extruded aluminium for better heatsink of LED
- Moisture control device to reduce misting on glass

- Rubber H07RNF cable length for IP-67 = 1mtr, for IP-68 = 3mtr with gland
- Additional cable length to be ordered separately
- Wire for mains supply cable 3c×1.5mm²
- IP-68 fast connector integrated for cable O.D. 6-10mm
- Reiz Electronic LED driver constant current remote, THD<10% PF>0.95
- LED CRI : 85